







Safety Plus


Heterogeneous Vinyl

-  Buses and Coaches
-  Trains and Metros
-  Healthcare, Education, Industry
-  Retail, Restaurants, Commerce





Topflor


The ultimate flooring
The ultimate performance

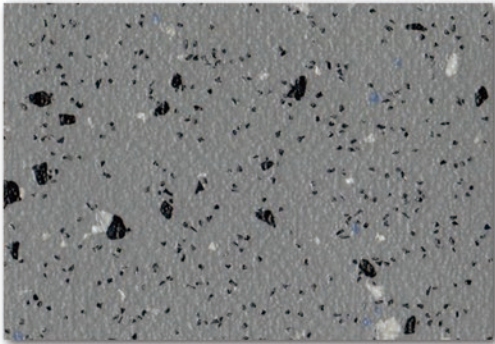


 3801

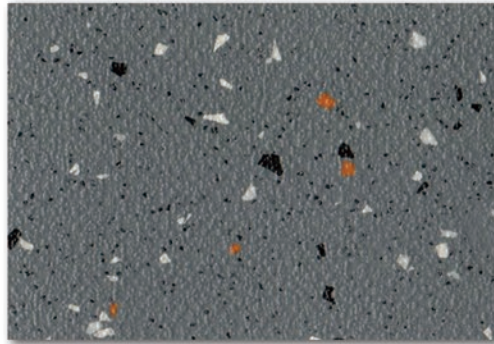


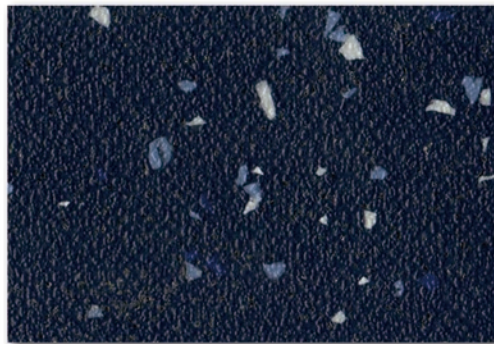
 3802

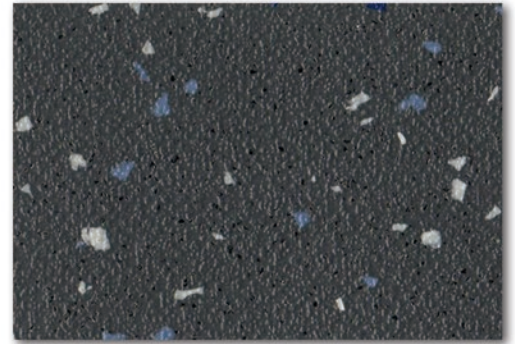


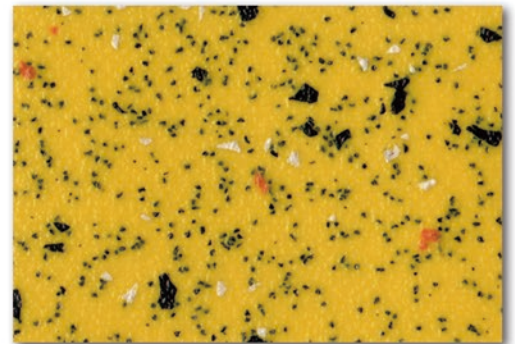
 3803

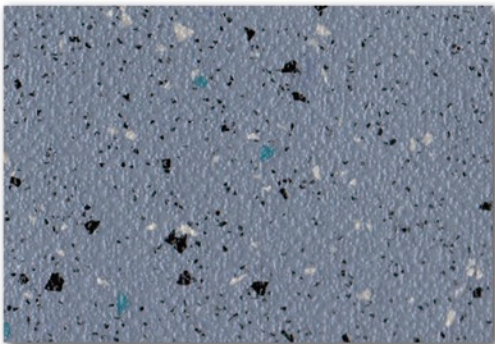


 3804




 3805




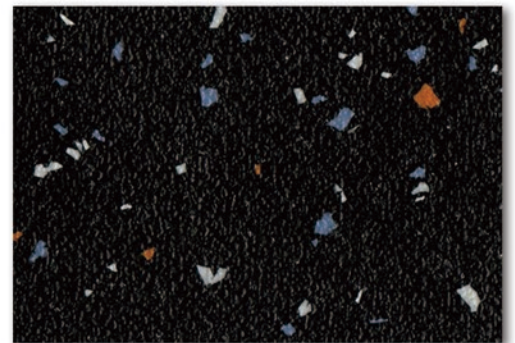
 3806

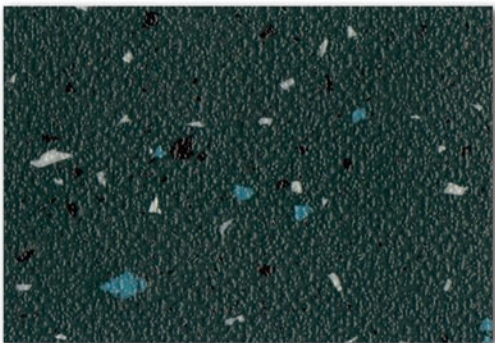


 3807

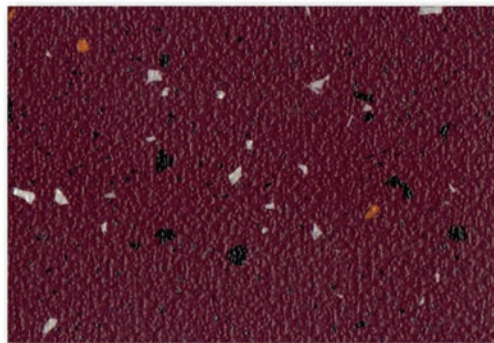


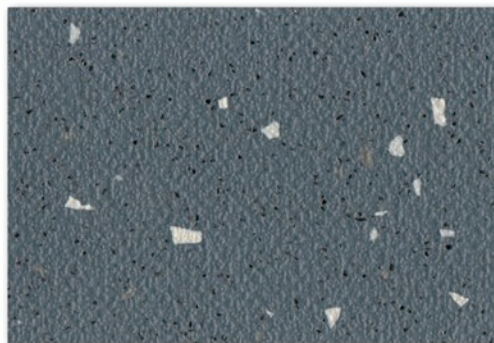
 3808




 3809

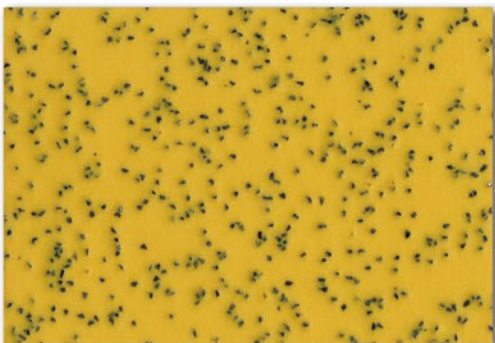


 2501




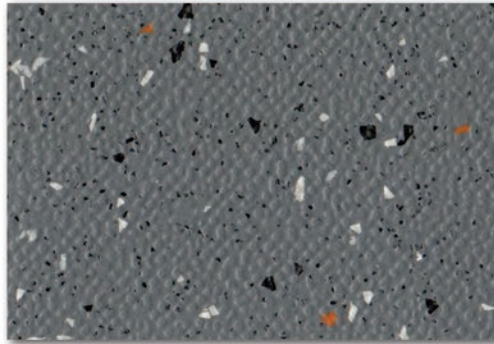
 2502

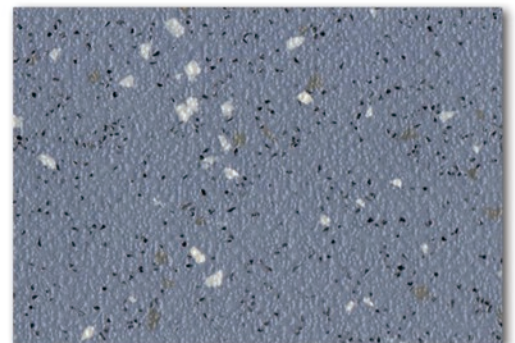


 2503

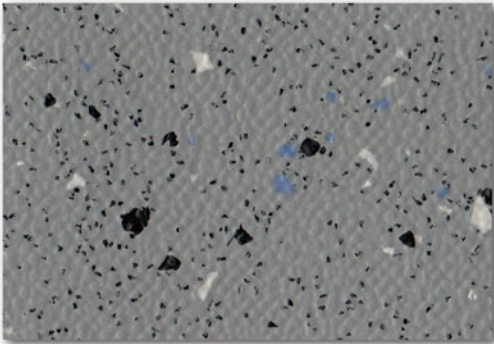


 4901




 4902

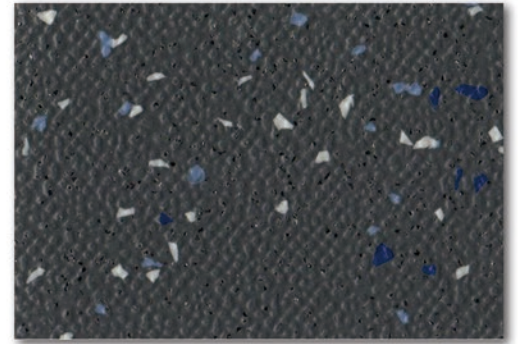


 4903

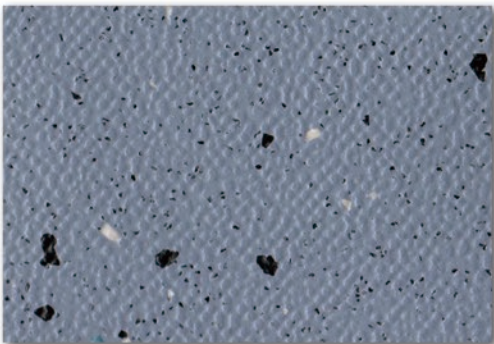


 4904

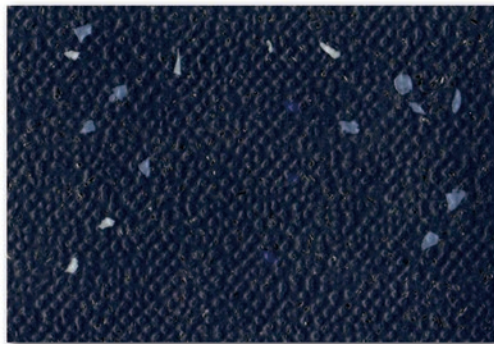


 4905

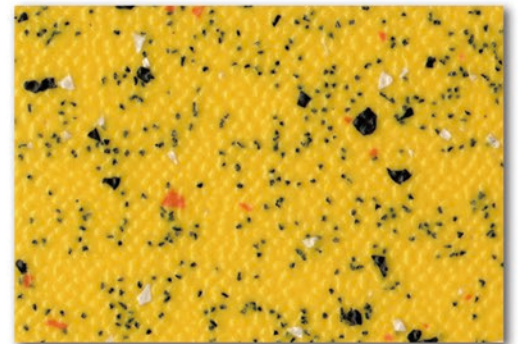


 4906

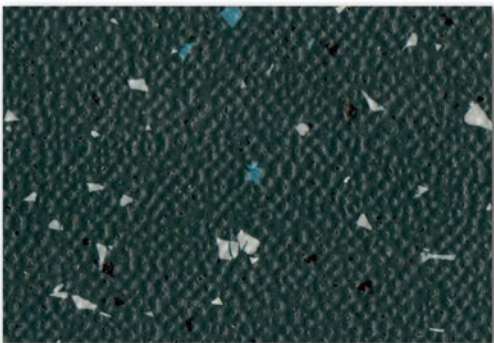


 4907

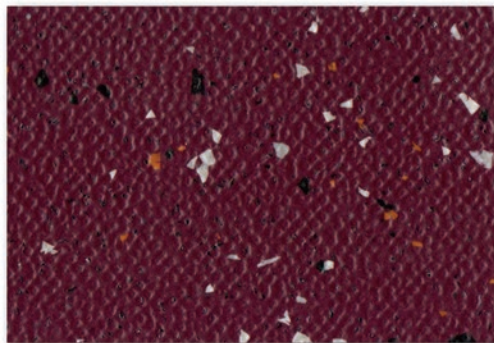


 4908

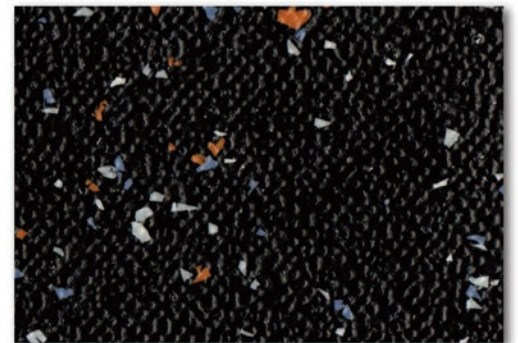


 4909

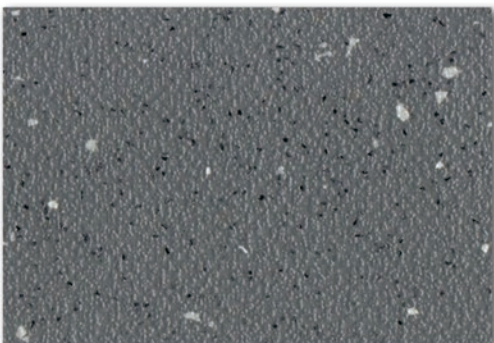

 2504



Safety Plus



Safety Plus is a safety vinyl flooring range combining the assurance of sustainable wet slip resistance with high durability for years of performance in extreme, heavy footfall commercial areas. Available with enhanced slip resistance, the range features a concentrated level of safety aggregates in the vinyl to ensure underfoot safety. Provides low slip potential in busy commercial kitchens and food processing areas where oil and grease are regular contaminants.

INSTALLATION

Safety Plus vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	0.80mm
Weight	EN 430	g/m ²	2450g/m ²
Roll width	EN 426	cm	200cm
Roll length	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	EN 13 501-1	--	Class Bfl-S1
	EN ISO 9239-1	kW/m ²	> 8
	GB 8624-2006	--	GB 8624 B1
Electrical resistance	EN 1815	kV	< 2
	EN1081	Ω	≥10 ⁹
Slip resistance dry	EN 13893	--	≥0.3
Slip resistance wet	DIN 51130	--	R10

PERFORMANCE			
Wear resistance	EN660-2	mm ³	≤2.0
Wear group	EN 649	group	T
	EN 651	group	T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	≤0.10
Impact sound reduction	EN ISO 717-2	dB	9
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN ISO 105 - B02	degree	≥6
Chemical products resistance	EN 423	--	Good
Castor wheel test	EN 425	--	No damage
Flexibility	EN 435	--	Excellent
Anti-bacterial and fungicidal	MRSA	--	Good
Surface treatment	--	--	PUR
Underfloor heating		°C	Suitable max. 30

CE MARKING			
	EN 14041		