



Safetred

Heterogeneous Vinyl



- Buses and Coaches
- Trains and Metros
- Healthcare, Education, Industry
- Offices, Restaurants, Hotels



Topflor

The ultimate flooring
The ultimate performance

Safetred

● 2.0mm(T) X 2.0m(W) X 20m(L)



👉 6101




👉 6102



👉 6103



👉 6104

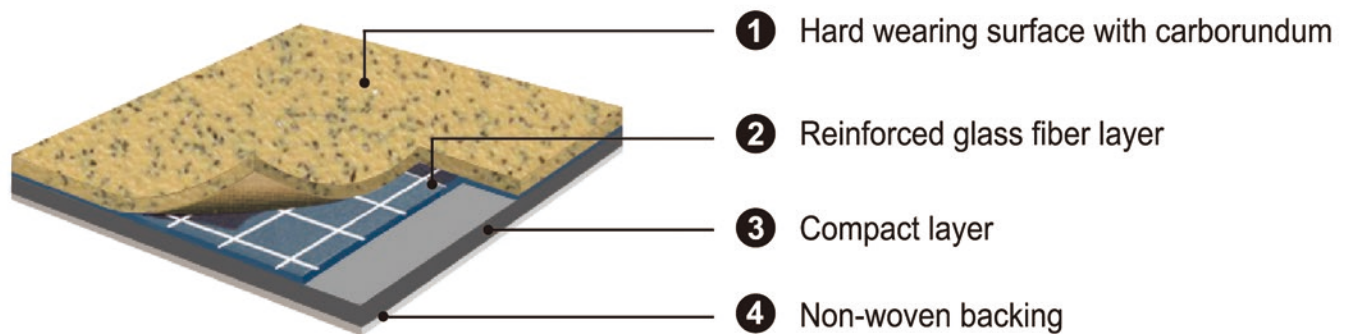


- Outstanding slip resistance properties
- Suitable for heavy traffic use
- Flexible and easy to install
- Safety clean reinforced surface for easy maintenance



Safetred


● 2.0mm(T) X 2.0m(W) X 20m(L)

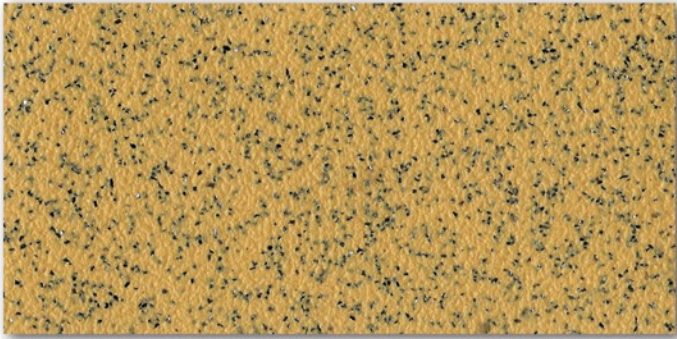


👉 6105




👉 6106

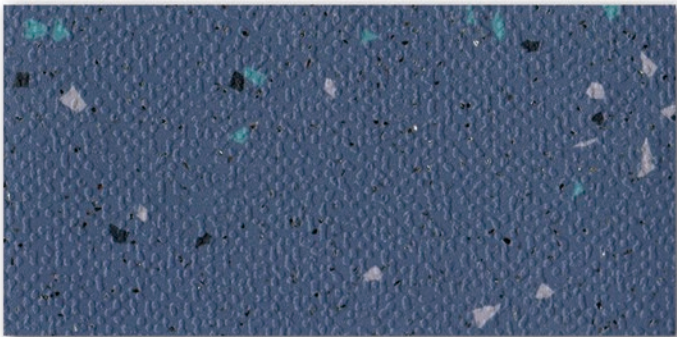


👉 7201

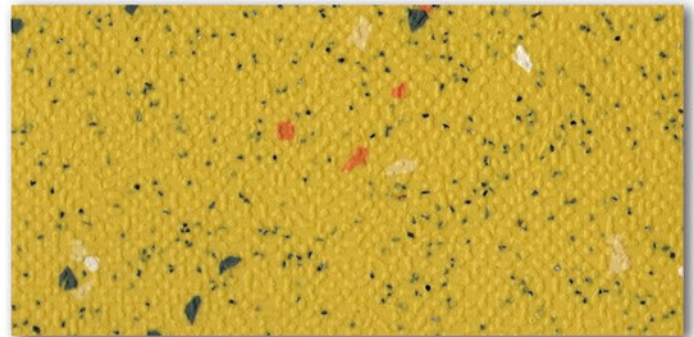


👉 7202

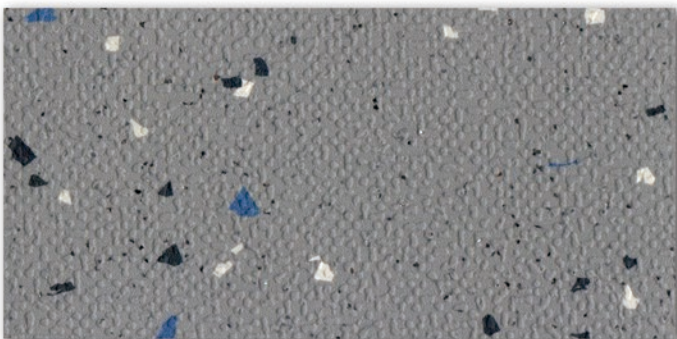


👉 7203

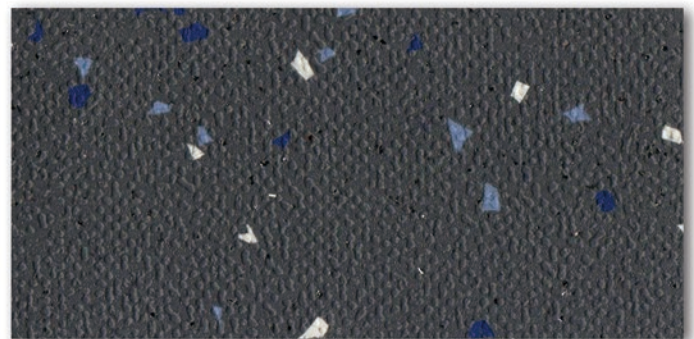

👉 7204

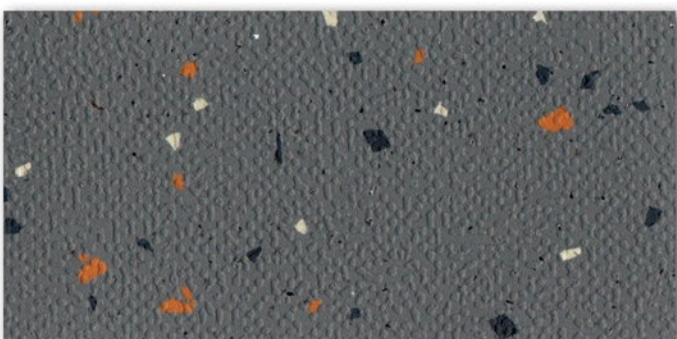

👉 7205

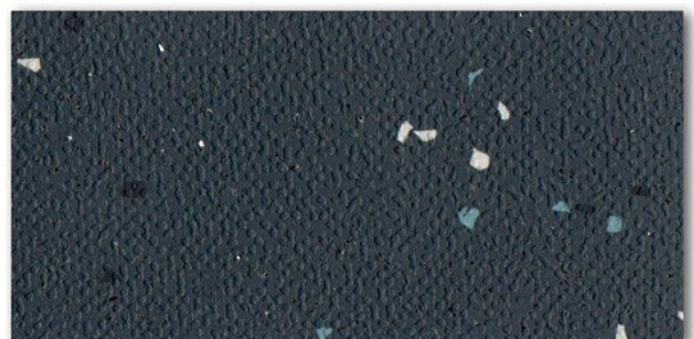

👉 7206



SAFETRED is a slip resistant floorcovering constructed from vinyl with deeply inlaid carborundum particles. It is reinforced with a glassfibre grid and available in sheet form. SAFETRED is suitable for use in all areas of heavy traffic where slip-resistance, durability, cleanliness and hygiene are required.

INSTALLATION

SAFETRED vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by Topflor's Technical Department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using Topflor matching weld rod.

MAINTENANCE


Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	0.70mm
Weight	EN 430	g/m ²	2350g/m ²
Roll width	EN 426	cm	200cm
Roll length	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	EN 13 501-1	--	Class Bfl-S1
	EN ISO 9239-1	kW/m ²	> 8
	GB 8624-2006	--	GB 8624 B1
Electrical resistance	EN 1815	kV	< 2
	EN1081	Ω	≥10 ⁹
Slip resistance dry	EN 13893	--	≥0.3
Slip resistance wet	DIN 51130	--	R10

PERFORMANCE			
Wear resistance	EN660-2	mm ³	≤2.0
Wear group	EN 649	group	T
	EN 651	group	T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	≤0.10
Impact sound reduction	EN ISO 717-2	dB	9
Thermal conductivity	EN 12 524	W/(m.K)	0.25
Colour fastness	EN ISO 105 - B02	degree	≥6
Chemical products resistance	EN 423	--	Good
Castor wheel test	EN 425	--	No damage
Flexibility	EN 435	--	Excellent
Anti-bacterial and fungicidal	MRSA	--	Good
Surface treatment	--	--	PUR
Underfloor heating		°C	Suitable max. 30

CE MARKING			
	EN 14041	