

# TOP3000

Homogeneous Vinyl

- Healthcare, Education
- Retail, Industry
- Office, Restaurant
- Heavy traffic areas




**Topflor**


The ultimate flooring  
The ultimate performance

# TOP3000


● 2.0mm(T) X 2.0m(W) X 20m(L)

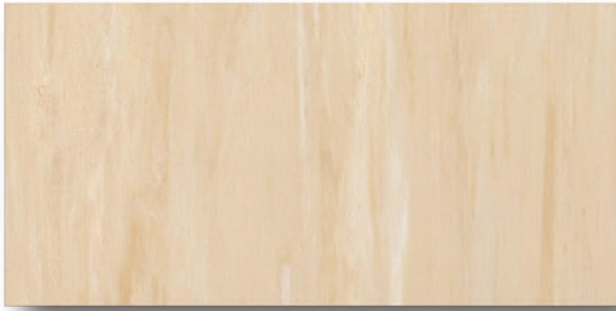

2201

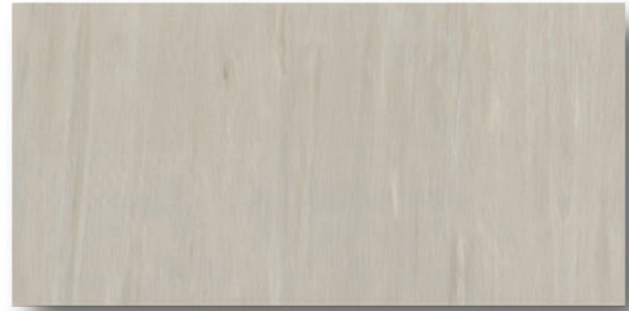


2202

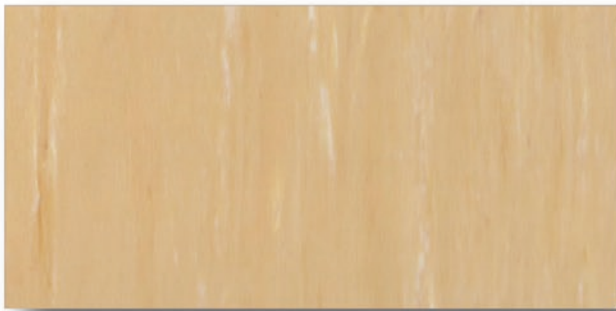

2203




2204

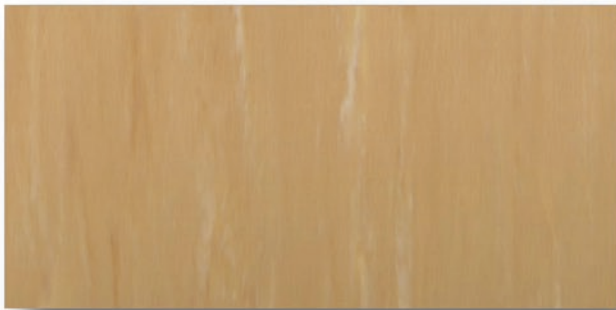


2205



2206

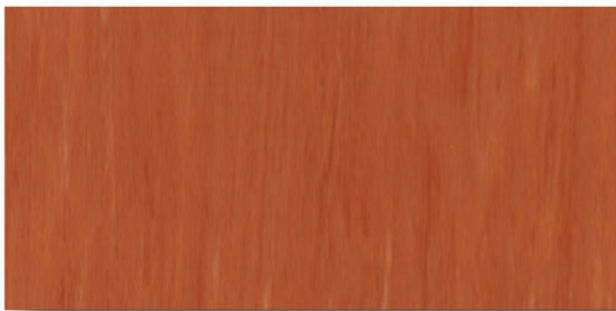

2207

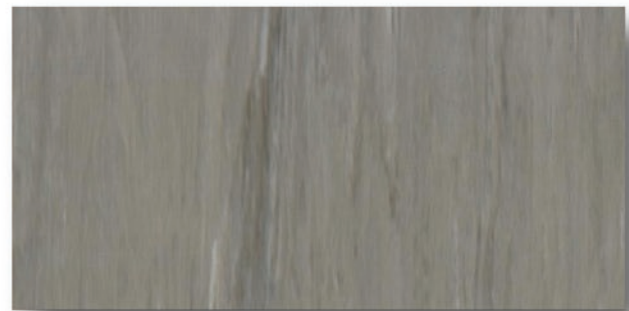

2208



2209



2210

# TOP3000

● 2.0mm(T) X 2.0m(W) X 20m(L)



2211



2212




2213



2214



2215

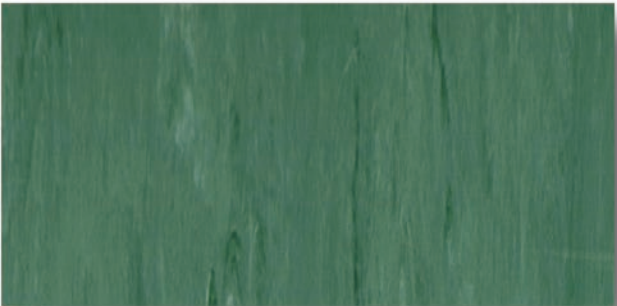

2216



2217




2218



2219

# TOP3000



TOP3000 is a homogeneous vinyl floorcovering suitable for most heavy traffic areas such as healthcare, education, retail and industry. TOP3000 is available in 19 colors and made of high quality raw materials. It receives a PUR surface treatment for protection and easy maintenance. The PUR also provides a better base for future maintenance.

## INSTALLATION

TOP3000 homogenous vinyl should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floorcovering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

## TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	2.0mm
Wearlayer thickness	EN 429	mm	2.0mm
Weight	EN 430	g/m <sup>2</sup>	3300g/m <sup>2</sup>
Width	EN 426	cm	200cm
Length of sheet	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	NF P 92-506	--	M2
	EN 13 501-1	--	Class Bfl-S1
	DIN 4102	--	B1
	GB 8624-1997	--	GB 8624 B1
Toxic testing	GB 18586-2001	--	Pass
Electrical resistance	EN 1815	kv	< 2
	EN 1081	Ω	>10 <sup>9-10</sup>
Slip resistance dry	EN 13893	--	≥0.3
Slip resistance wet	DIN 51130	--	R9

PERFORMANCE			
Abrasion resistance	EN 649	--	Group P
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	approx. 0.08
Thermal resistance	EN 12667	m <sup>2</sup> K/W	≈ 0.01
Colour fastness	EN ISO 105 - B02	degree	≥6
Chemical resistance	EN 423	--	good
Castor wheel test	EN 425	--	suitable
Impact sound reduction	EN ISO 717/2	dB	approx. + 4
Flexibility	EN 435	--	excellent
Hygiene treatment	MRSA	--	very good
	DIN EN ISO 846-A/C	--	Good
Surface treatment			PUR
Underfloor heating		°C	suitable max. 28
Maritime usage	IMO RES A 653 (16)-IMO MSC 61 (67) Annex 1 Part 2,5		

## CE MARKING



EN 14041

