

# Nature

Heterogeneous Vinyl

- > Healthcare
- > Education
- > Offices
- > Leisure
- > Retail
- > Public building



**Topflor**

The ultimate flooring  
The ultimate performance






0904 White




0504 Cream



0402 Light

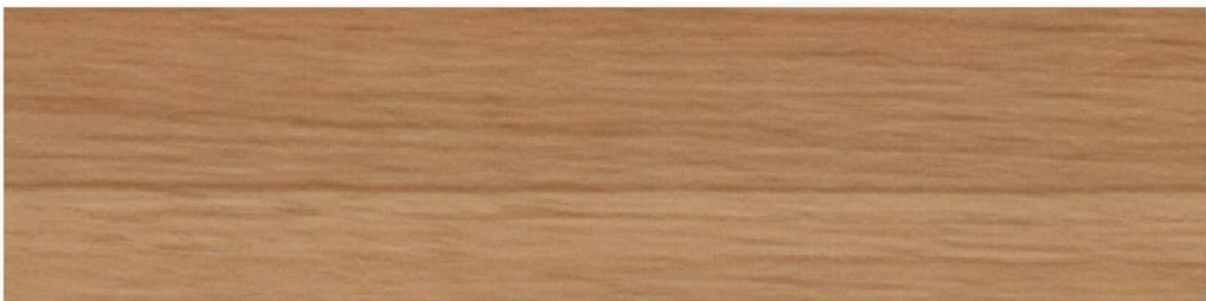

0403 Honey

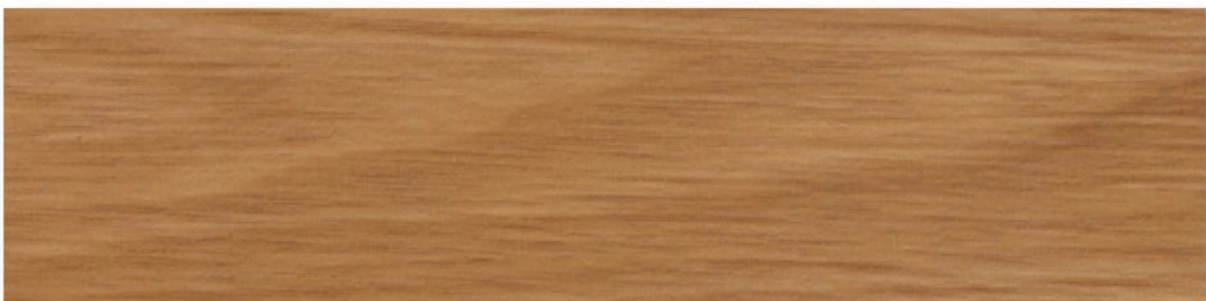

0503 Honey






0903 Beige



0902 Rustic



0505 Brown

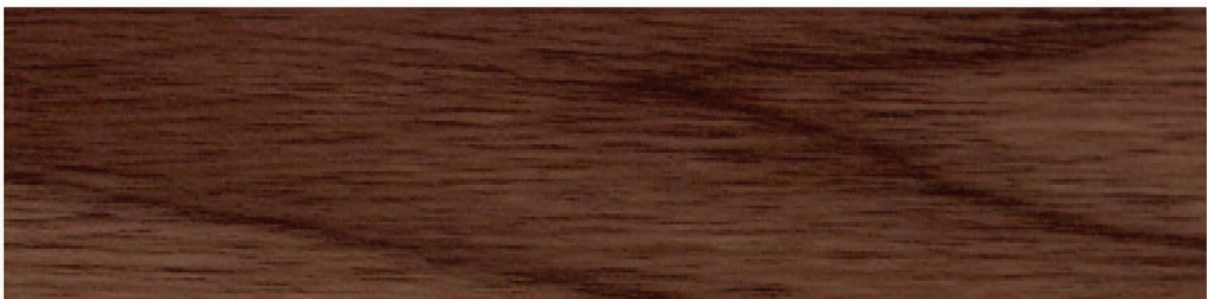

0506 Exotic



0901 Black







0811 Calaité



0802 Light Grey



0801 Sable



0804 Slate



0807 Yellow



0809 Clay



0808 Ocre



0810 Jade



0806 Anthracite



0805 Brown



Designed for performance

Creating the ultimate flooring experience

The best solution for every area and every application



Hospital, clinics and residential homes



Offices



Public buildings



School, universities and nurseries




Transport



Shops



Hotels



Industry



# Nature



Nature heterogeneous vinyl flooring offers good resistance to indentation, abrasion and tearing. With a range of designs that provide outstanding creative opportunities, it is ideal for high-traffic areas in healthcare, education, offices, leisure, retail and public building.

The surface benefits from UV treatment means no wax and no polish for life. It also requires less water and detergents for cleaning, providing clear benefits for both the environment and for life cycle costs.

## INSTALLATION

Nature vinyl sheet should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying. Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24°C. All seams must be heat welded using the matching weld rod.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

## TECHNICAL DATA

DESCRIPTION			STOCK	CUSTOMIZATION
Total thickness	EN 428	mm	2.0mm	2.6mm
Wearlayer thickness	EN 429	mm	0.4mm	0.7mm
weight	EN 430	g/m <sup>2</sup>	3000g/m <sup>2</sup>	3800g/m <sup>2</sup>
Roll width	EN 426	cm	200cm	200cm
Roll length	EN 426	m	20m	15m
CLASSIFICATION				
Classification	EN 685	class	33-42	34-43
Fire rating	NF P 92-506	--	M2	M2
	EN 13 501-1	--	Bfl-S1	Bfl-S1
	ASTM E648	--	Class 1	Class 1
	GB 8624-2012	--	B1	B1
Toxic testing	GB 18586-2001	--	Pass	Pass
Electrical resistance	EN 1815	kv	< 2	< 2
	EN 1081	Ω	≥10 <sup>9</sup>	≥10 <sup>9</sup>
Slip resistance dry	EN 13893	--	≥0.3	≥0.3
Slip resistance wet	DIN 51130	--	R9	R9
PERFORMANCE				
Abrasion group	EN 649	--	Group T	Group T
Dimensional stability	EN 434	%	≤0.40	≤0.40
Residual indentation	EN 433	mm	0.03	0.03
Thermal conductivity	EN 12 524	W/(m.K)	0.25	0.25
Colour fastness	EN ISO 105 - B02	degree	≥6	≥6
Chemical resistance	EN 423	--	Good	Good
Castor wheel test	EN 425	--	Suitable	Suitable
Impact sound reduction	EN ISO 717/2	dB	Approx.+4	Approx.+6
Flexibility	EN 435	--	Excellent	Excellent
Anti-bacterial and fungicidal	MRSA	--	Good	Good
	DIN EN ISO 846 -A/C	--	Good	Good
Surface treatment			UV	UV
Underfloor heating		°C	Suitable max.28	Suitable max.28
CE MARKING				
	EN 14041			