



# SALON

Heterogeneous Vinyl

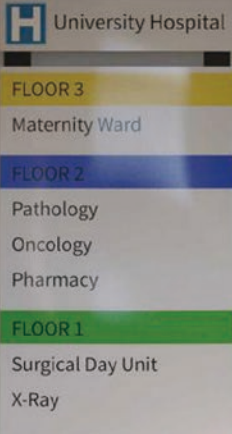

- > Education
- > Healthcare
- > Offices
- > Leisure
- > Retail
- > Public building

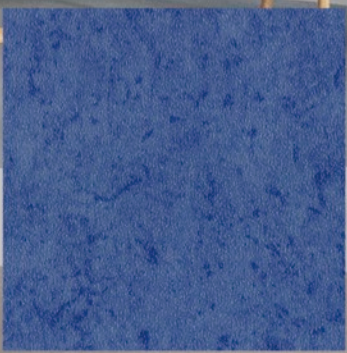

The ultimate flooring  
The ultimate performance





35210 Light Wood



35219 Classic Wood



35215 Washed Wood



35213 Natural Wood



35222 Golden Wood



35217 Merbau Wood



35225 Brown Wood



35223 Black Wood







35104 Ivory




35115 Beige

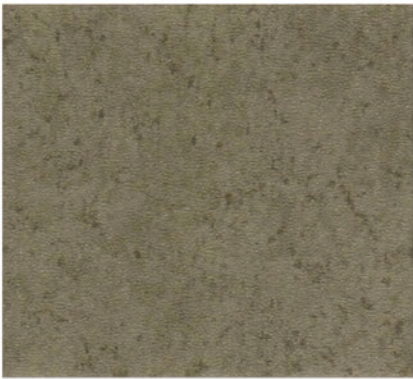

35103 Light Brown

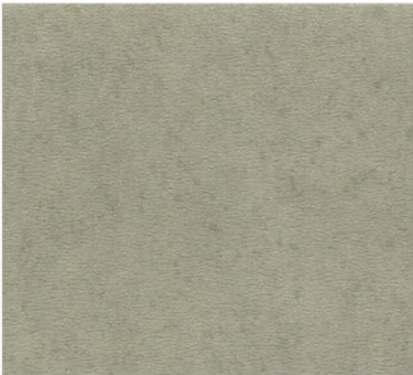

35101 Light Grey

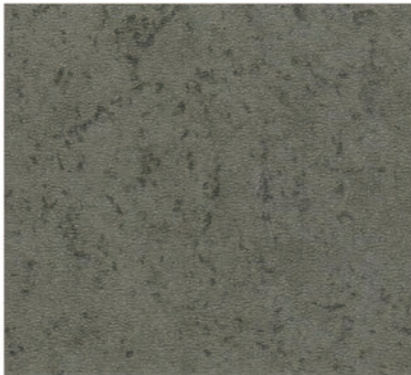

35102 Medium Grey



35113 Red






35108 Sand




35109 Yellow




35110 Orange

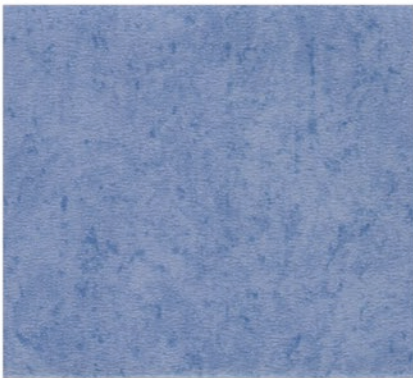

35105 Sky Blue

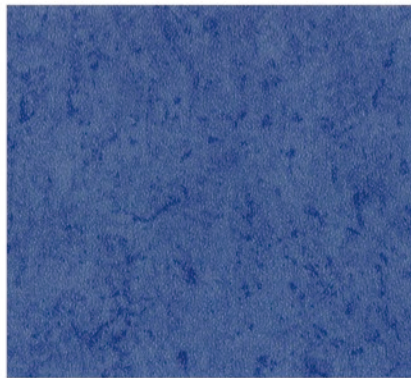

35106 Light Blue

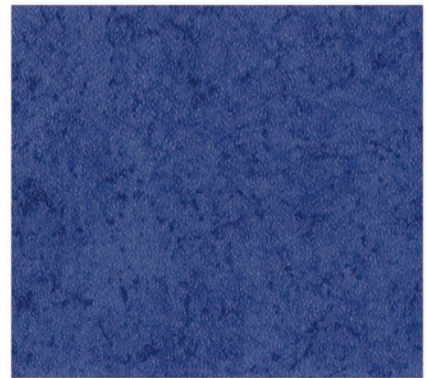

35107 Medium Blue



35111 Lime



35112 Green



35114 Rose








Designed for performance

Creating the ultimate flooring experience

The best solution for every area and every application

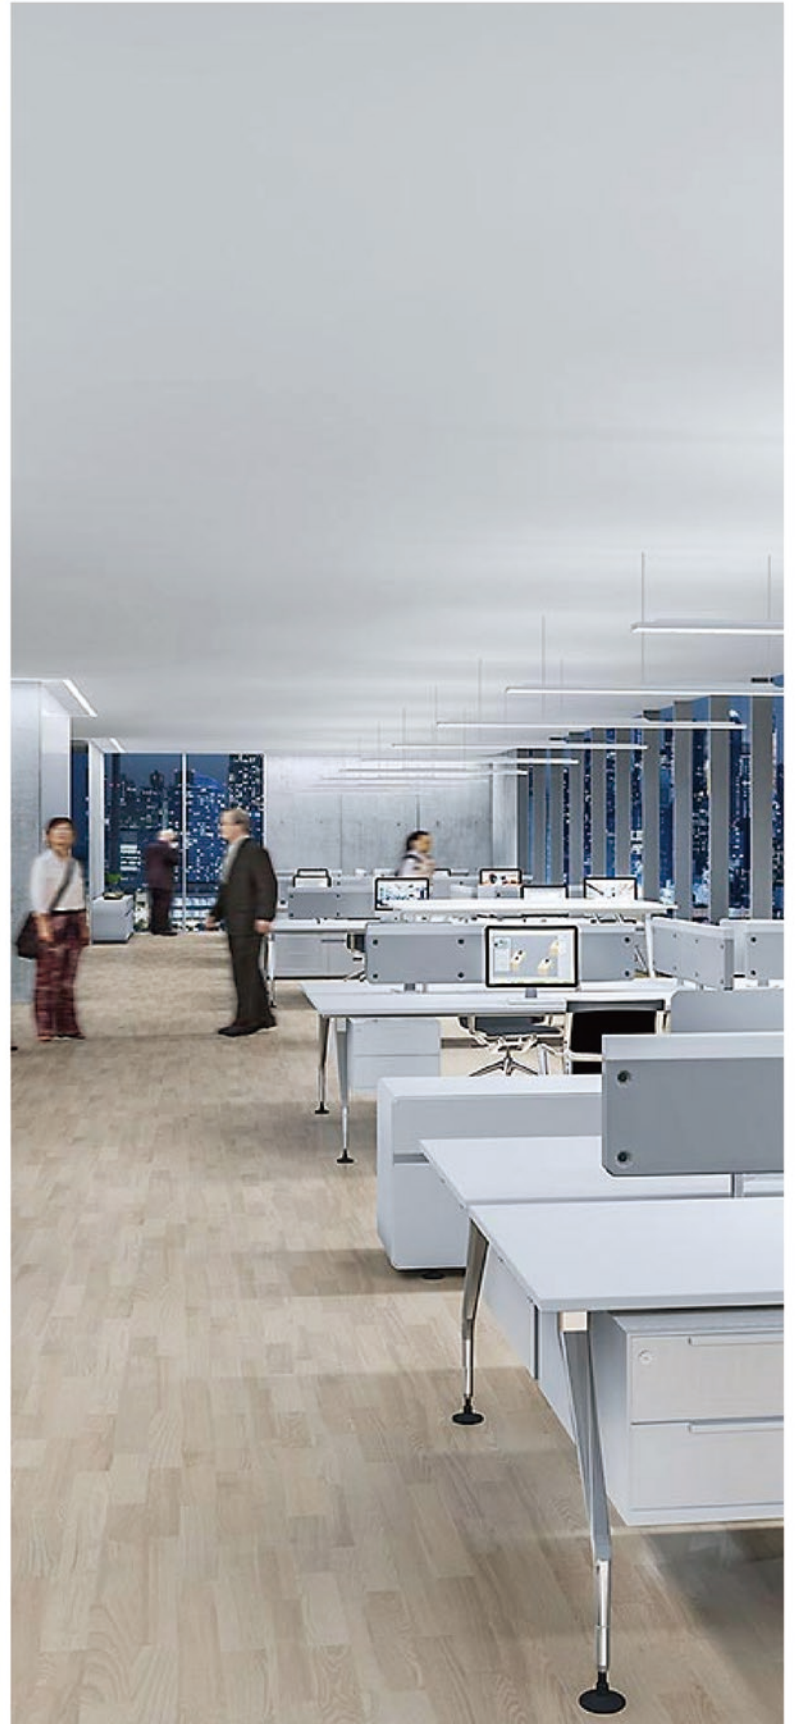



Salon heterogeneous vinyl flooring offers excellent acoustic properties plus good resistance to indentation, abrasion and tearing. With a range of designs that provide outstanding creative opportunities, it is ideal for high-traffic areas in education, healthcare, offices, leisure and retail.

The surface benefits from PUR treatment means no wax and no polish for life. It also requires less water and detergents for cleaning, providing clear benefits for both the environment and for life cycle costs. Salon is also available in compact version.

## INSTALLATION

Salon vinyl sheet should be stored vertically. Installation should be made in accordance with installation guidelines supplied and regularly updated by our technical department. Installation should be carried out in accordance with local standards. Subfloor to be smooth, hard, clean and dry prior to laying.

Where applicable the subfloor must incorporate an effective Damp Proof Membrane. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24 °C. All seams must be heat welded using the matching weld rod.

## MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the floor. The floor covering should be maintained with regular sweeping and damp mopping using a neutral cleanser, or machine scrubbing with an appropriate pad. Further maintenance instructions are available upon request.

## TECHNICAL DATA

DESCRIPTION			
Total thickness	EN 428	mm	3.5mm
Wearlayer thickness	EN 429	mm	0.7mm
Weight	EN 430	g/m <sup>2</sup>	3680g/m <sup>2</sup>
Roll width	EN 426	cm	180cm
Roll length	EN 426	m	20m

CLASSIFICATION			
Classification	EN 685	class	34-43
Fire rating	NF P 92-506	--	M2
	EN 13 501-1	--	Class Bfl-S1
	ASTM E648	--	Class 1
	GB 8624-2006	--	GB 8624 B1
Toxic testing	GB 18586-2001	--	Pass
Electrical resistance	EN 1815	kv	< 2
	EN1081	Ω	≥10 <sup>9</sup>
Slip resistance dry	EN 13893	--	≥0.3
Slip resistance wet	DIN 51130	--	R9

PERFORMANCE			
Abrasion group	EN 649	--	Group T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	0.05
Thermal resistance	EN 12 524	W/(m.K)	0.25
Colour fastness	EN ISO 105 - B02	degree	≥6
Chemical resistance	EN 423	--	Good
Castor wheel test	EN 425	--	Suitable
Impact sound reduction	EN ISO 717/2	dB	18
Flexibility	EN 435	--	Excellent
Anti-bacterial and fungicidal	MRSA	--	Very Good
	DIN EN ISO 846-A/C	--	Good
Surface treatment			PUR
Underfloor heating		°C	Suitable max. 28

CE MARKING			
	EN 14041		