


ProtectWALL


Vinyl Wallcovering

- >Kindergarten
- >Healthcare
- >Education
- >Hotel
- >Home
- >Shops & Stores

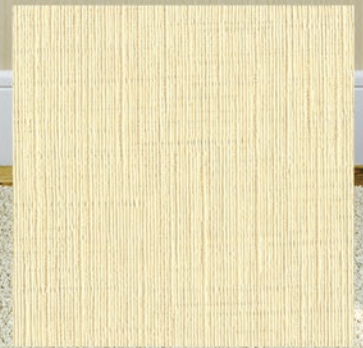


Topflor

The ultimate flooring
The ultimate performance

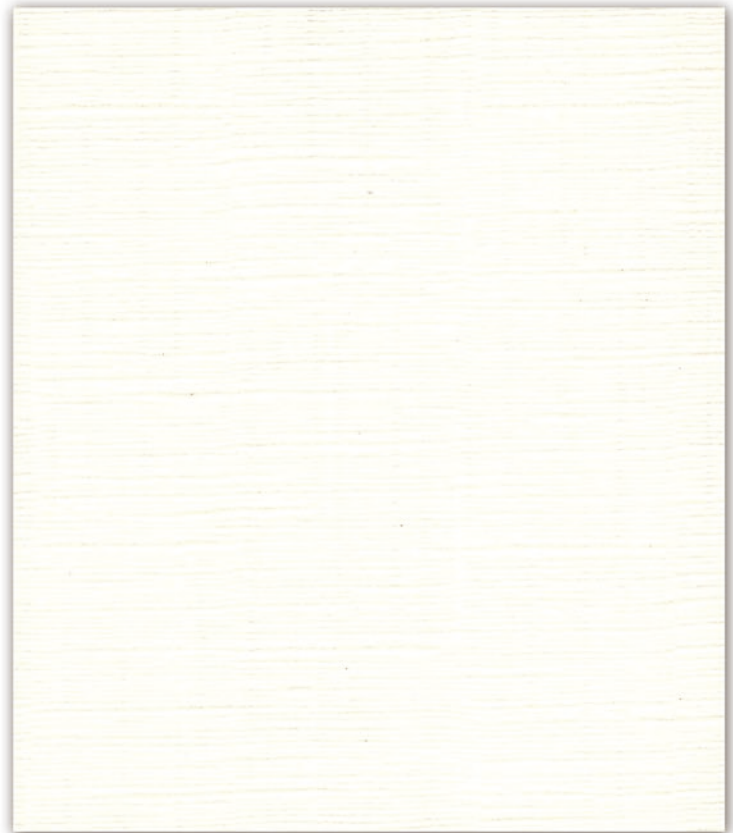


 2301

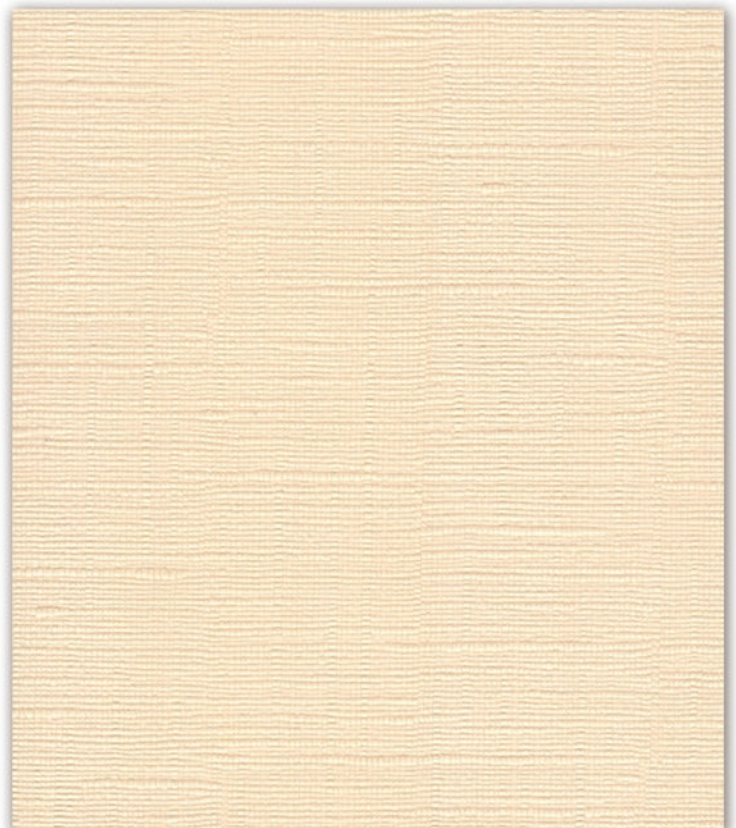

 2302




 2303



 2304




 2305



 2306



 2307




 2308




 2309



 2310

ProtectWALL



Designed to suit all wall conditions, ProtectWALL provides high performance protection for walls from staining and mechanical damage, and from water and other fluids. Watertight and hardwearing, the high quality multilayered vinyl meets all current fire regulations for walls. ProtectWALL can be incorporated into a complete interior design, particularly valuable for sectors such as healthcare and light industry. ProtectWALL can also be used for wetrooms in any sector. ProtectWALL is also exceptionally hygienic due to the unique PU coating that makes it extremely easy to clean and maintain.


INSTALLATION

ProtectWALL should be stored vertically. Installation should be carried out in accordance with local standards. All surfaces to be primed with an appropriate primer and allowed to dry overnight prior to the application of the vinyl sheet. The material must be allowed to acclimatise 24 hours prior to installation in a room temperature of between 18-24 C.

MAINTENANCE

Maintenance should be carried out regularly to retain the appearance and durability of the wallcovering. ProtectWALL should be maintained using a fine grade abrasive pad with a neutral cleanser. Further maintenance instructions are available upon request.

- ┘ Impervious surface with PU coating
- ┘ Hygienic and watertight
- ┘ Easy to install - vertically or horizontally
- ┘ Anti-bacterial and fungicidal

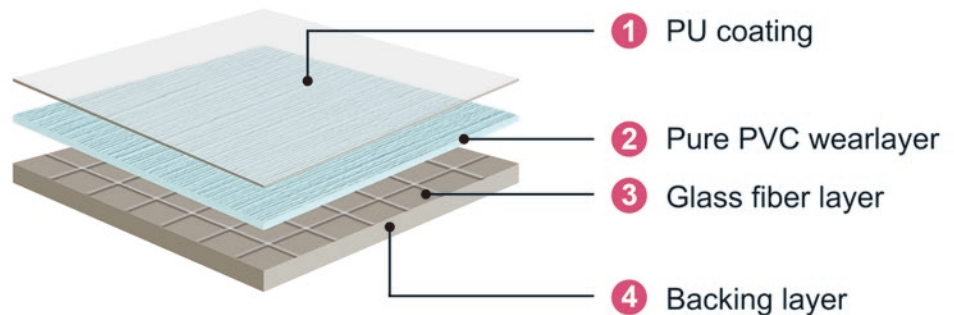

TECHNICAL DATA

| DESCRIPTION | | | |
|---------------------|--------|------------------|----------------------|
| Total thickness | EN 428 | mm | 2.0mm |
| Wearlayer thickness | EN 429 | mm | 2.0mm |
| Weight | EN 430 | g/m ² | 1050g/m ² |
| Roll width | EN 426 | cm | 150cm |
| Roll length | EN 426 | m | 30m |

| CLASSIFICATION | | | |
|----------------|---------------|-------|--------------|
| Fire rating | NF P 92-506 | class | M1 |
| | GB 8624-2006 | -- | GB 8624 B-s2 |
| | GB 18586-2001 | -- | Pass |

| PERFORMANCE | | | |
|-----------------------|-----------------|--------|-------|
| Dimensional stability | EN 434 | % | ≤0.40 |
| Colour fastness | EN 20 105 - B02 | degree | ≥6 |
| Chemical resistance | EN 423 | -- | Good |
| Surface treatment | -- | -- | PU |

