



# Square

Rubber flooring




**Topflor**

The ultimate flooring  
The ultimate performance

# Square

 2.0mm


 1.22m X 15m



1521



1522

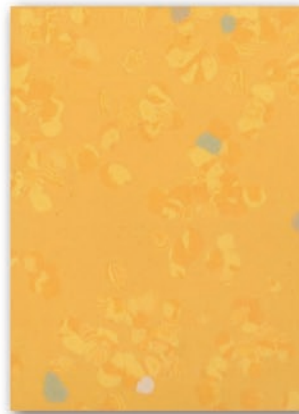

1523



1524



1525



1526




1527



1528



1529

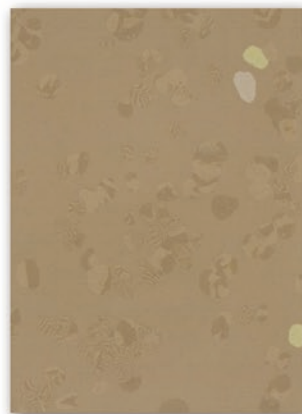

1530



1531



1532



1533



1534




1535






1536

# Square

 2.0mm

 1.22m X 15m

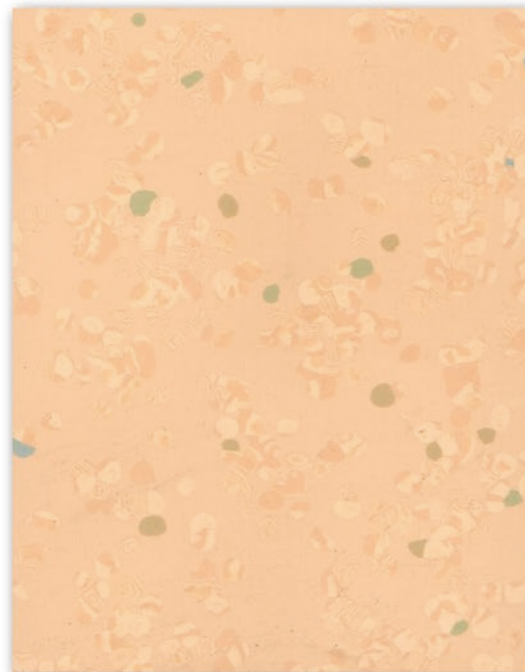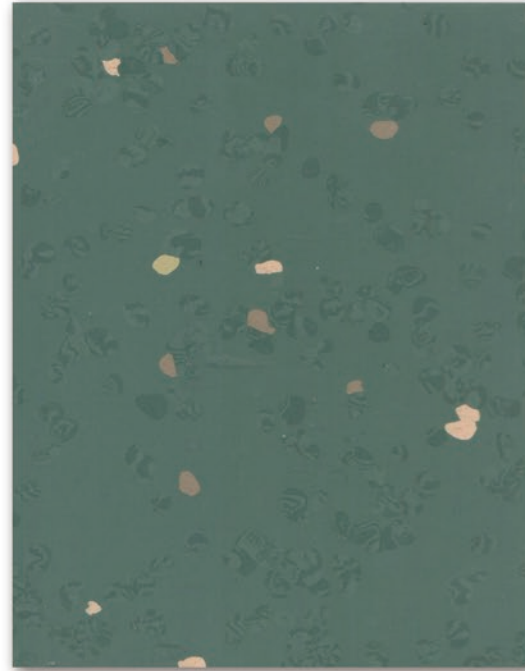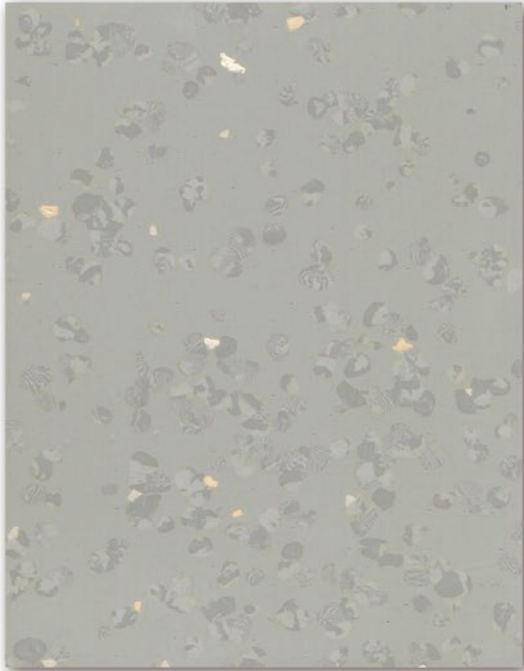

\* Customized thickness and colour are available.

# Square



Rubber flooring with a changing base colour consisting of three harmoniously matched colour components and characteristic granule inclusions

## PRODUCT FEATURES

resistant to chemicals | no damages from short-time exposures to solvents, acids and alkaline agents  
skin disinfectants such as iodine | containing products can be removed easily  
bacteriostatic and fungistatic property  
dimensionally stable when installed, thus can be installed without joint | sealing even in large areas

## APPLICATION

airport, hospital, school, library, office building etc | corridor, escape route, patient room, ward station intensive care unit, visitor room, administration office

## TECHNICAL DATA

	Overall thickness	EN 428	2 mm
	Roll size	EN 426	1.22m X 15m
	Total weight	EN 430	3600 g/m <sup>2</sup>
	Reaction to fire	EN 13501-1	Class Bfl-s1
	Electrical resistance	EN 1815	≤ 2kV
	Slip resistance	DIN 51130	R 9
	Abrasion resistance	ISO 4649	130mm <sup>3</sup>
	Residual indentation	EN 433	0.05mm
	Dimensional stability	EN 434	± 0.3%
	Colour fastness	EN 20 105-B02	≥ 6
	Resistance to chemicals	EN 423	Good
	Castor chair test	EN 425	Suitable
	Impact sound insulation	EN ISO 717-2	8 dB

## CE MARKING



EN 14041

